




Your Solutions Partner

DUKE



Product Holding Units



HS2 (HeatSink™ 2)

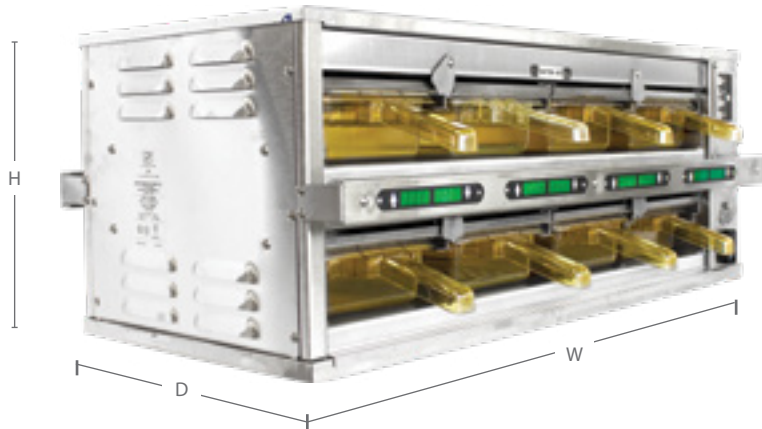

The HS2 Holding Unit was developed specifically to **increase hold times, improve food quality and consistency**. Duke's innovative top and bottom HeatSink™ technology gives you the ability to maintain gold standard sensory attributes at significantly extended hold times while delivering hotter food to your customers.

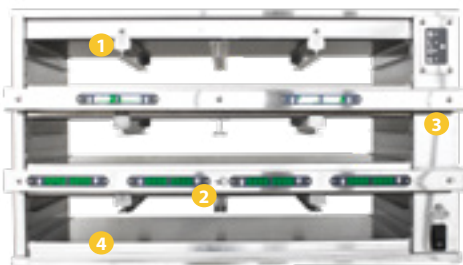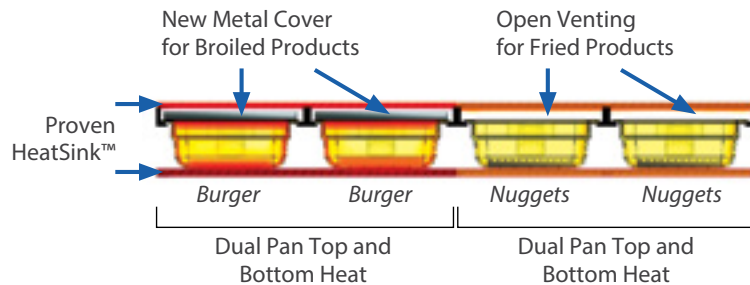

- ① Robust metal cover eliminates the cost and hassle of plastic lids. Cover only required for broiled products
- ② Fully sealed, user replaceable timer bars that are designed for cleanability
- ③ Eliminate faceplate cracks with new stainless steel construction
- ④ Sturdy, fully sealed shelves to prevent grease migration

Notes:

- Pans are sold separately and color is subject to change
- Warranty: Standard 1 year parts and labor

Pan Size:



HS2 pans are 2.5" deep 1/3 size





HS2 - 2x2

H 12⁷/₈ in
32.8 cm

W 18³/₄ in
47.4 cm

D 18³/₈ in
46.5 cm

Model	Electrical Requirements				Timerbar Options	Control Options
	Voltage	Hz	Amps	Plug		
HS2-22	208-240	50 / 60	8.7-7.5	6-15P	1. Single 2. Dual	With daypart switch
	220-240	50 / 60	8.2-7.5	IEC 60309		



HS2 - 2x3

H 12⁷/₈ in
32.8 cm

W 25³/₄ in
65.3 cm

D 18³/₈ in
46.5 cm

Model	Electrical Requirements				Timerbar Options	Control Options
	Voltage	Hz	Amps	Plug		
HS2-23	208-240	50 / 60	8.7-7.5	6-15P	1. Single 2. Dual	With daypart switch
	220-240	50 / 60	8.2-7.5	IEC 60309		



HS2 - 2x4

H 12⁷/₈ in
32.8 cm

W 32⁷/₈ in
83.3 cm

D 18³/₈ in
46.5 cm

Model	Electrical Requirements				Timerbar Options	Control Options
	Voltage	Hz	Amps	Plug		
HS2-24	208-240	50 / 60	12-10	6-15P	1. Single 2. Dual	With daypart switch
	220-240	50 / 60	11-10	IEC 60309		



HS2 - 3x4

H 18⁵/₈ in
47.2 cm

W 32⁷/₈ in
83.3 cm

D 18³/₈ in
46.5 cm

Model	Electrical Requirements				Timerbar Options	Control Options
	Voltage	Hz	Amps	Plug		
HS2-34	208-240	50 / 60	17.3-15	6-15P	1. Single 2. Dual	With daypart switch
	220-240	50 / 60	16-15	IEC 60309		



HS2 - 4x2

H 24 1/4 in
61.5 cm

W 18 3/4 in
47.4 cm

D 18 3/8 in
46.5 cm

Model	Electrical Requirements				Timerbar Options	Control Options
	Voltage	Hz	Amps	Plug		
HS2-42	208-240	50 / 60	12-10	6-15P	1. Single 2. Dual	With daypart switch
	220-240	50 / 60	11-10	IEC 60309		



Your Solutions Partner

www.dukemfg.com



Your Solutions Partner

**DUKE CORPORATE
UNITED STATES, CANADA**

2305 N. Broadway
St. Louis, MO 63102

Toll Free: 800.735.3853
Phone: 314.231.1130
Fax: 314.231.5074

**EUROPE, MIDDLE EAST,
AFRICA, RUSSIA**

Duke Manufacturing C.R. s.r.o
Building #DC6, ProLogis Park
Prague D1 East, Na Dlouhem
86, Jazlovice - Ricany
251 01 Czech Republic

Calling from United Kingdom
and Ireland
Tel: +44.(0)1395.234140
Fax: +44.(0)1395.234154

Calling from Europe, Middle
East and Africa
Phone: (+420) 323 608 193

ASIA

No. 3 Building,
Lane 28, Yu Lv Road,
Malu Town, Jiading District
Shanghai 201801, China

Phone:
+86.21.59153525/59153526
Fax: +86.21.33600628